
REDUCER 0.75x + APO 180/1260 SPOTDIAGRAM

Off-Axis Distance	Т	RMS spot-radius	Vignett. %
D. DG MM	100.00	4.1 microns	O
14.00 MM	٠	5.3 microns	0
21.00 MM		7.4 microns	8
26.00 MM	*	8 microns	32
WL range 435-710 nm			

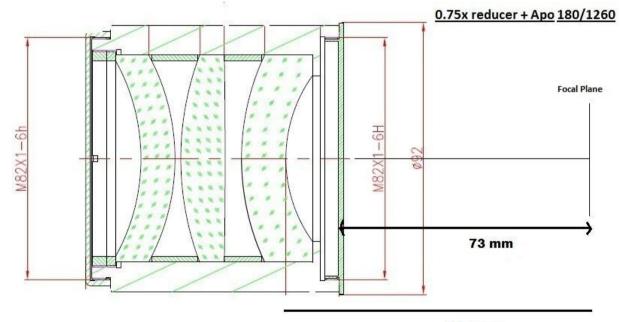

90.4 mm